

# Analog amplifier module


**RE 30224/12.10**

1/6

Replaces: –.–

**Type VT-MSPA1-30, VT-MSPA1-150**

Component series 1X

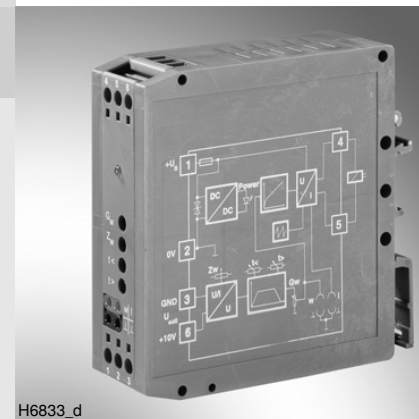

H6833\_d

## Table of contents

**Contents**

|                                                                      |   |
|----------------------------------------------------------------------|---|
| Features                                                             | 1 |
| Ordering code                                                        | 2 |
| Functional description                                               | 2 |
| Block diagram                                                        | 3 |
| Terminal assignment / device view                                    | 3 |
| Technical data                                                       | 4 |
| Output characteristic curve                                          | 5 |
| Unit dimensions                                                      | 5 |
| Project planning / maintenance instructions / additional information | 6 |

## Features

|             |                                                                          |
|-------------|--------------------------------------------------------------------------|
| <b>Page</b> |                                                                          |
| 1           | – Suitable for controlling direct operated proportional pressure valves: |
| 2           | • DBE(M) 30-3X                                                           |
| 2           | • DRE(M) 30-4X                                                           |
| 2           | – Inverse-polarity protection of the operating voltage                   |
| 3           | – Differential input for command value voltage +10 V                     |
| 3           | – Ramp generator up and down can be set separately                       |
| 4           | – Zero point potentiometer                                               |
| 5           | – 1 command value attenuator                                             |
| 5           | – Characteristic curve generator                                         |
| 6           | – Synchronized power output stage                                        |
| 6           | – Output short-circuit-proof                                             |
|             | – LED display:                                                           |
|             | • Ready for operation (green)                                            |
|             | – Measuring sockets for:                                                 |
|             | • Pressure command value                                                 |
|             | • Actual current value                                                   |
|             | – Dither generator with fixed frequency                                  |

## Ordering code

VT-MSPA1- -1X/V0/ \*

Analog amplifier module

For controlling the valves  
DBE(M) 30-3X and DRE(M) 30-4X

= 30

For controlling the valves  
DBE(M) 30-3X and DRE(M) 30-4X in  
connection with hydraulic pumps

= 150

Component series 10 to 19

= 1X

(10 to 19: Identical technical data and pinout)

Further details in the plain text

Standard version

## Functional description

Analog amplifier for controlling pressure valves without electric return. The modular design allows for simple top hat rail assembly as is usual in control cabinets.

### Command value input: 4

The module amplifier is controlled by means of a standard command value signal 0 to +10 V. By means of the zero point trimmer (Zw) (6), a zero point offset can be corrected.

### Ramp generator: 5

In the ramp generator (5), the actuating variable rise is limited. Using the trimmer "t <" (7), the time for the increasing command value signal is set and using trimmer "t >" (8), the time for the decreasing command value voltage is set. The adjustable time is contained in the technical data.

### Characteristic curve generator: 10

Using the trimmer "Gw" (9), the rated current for the solenoid is set. In the characteristic curve generator (10), the command value signal is changed so that a linear command value current characteristic curve results.

### Clock generator: 12

In the clock generator (12), a fixed frequency for the output stage is generated.


### Power output stage: 11-14

Using the actuating variable coming from the characteristic curve generator (10) and the clock frequency, the power output stage generates a PWM signal that is fed into the solenoid. The solenoid current is recorded and in the current controller (11) compared with the actuating variable and the difference is compensated.

### Fault recognition: 15

Monitors the solenoid lines with regard to cable break and short circuit as well as overcurrent of the output stage. If there is an error, the green Ready for operation display goes out.

Block diagram

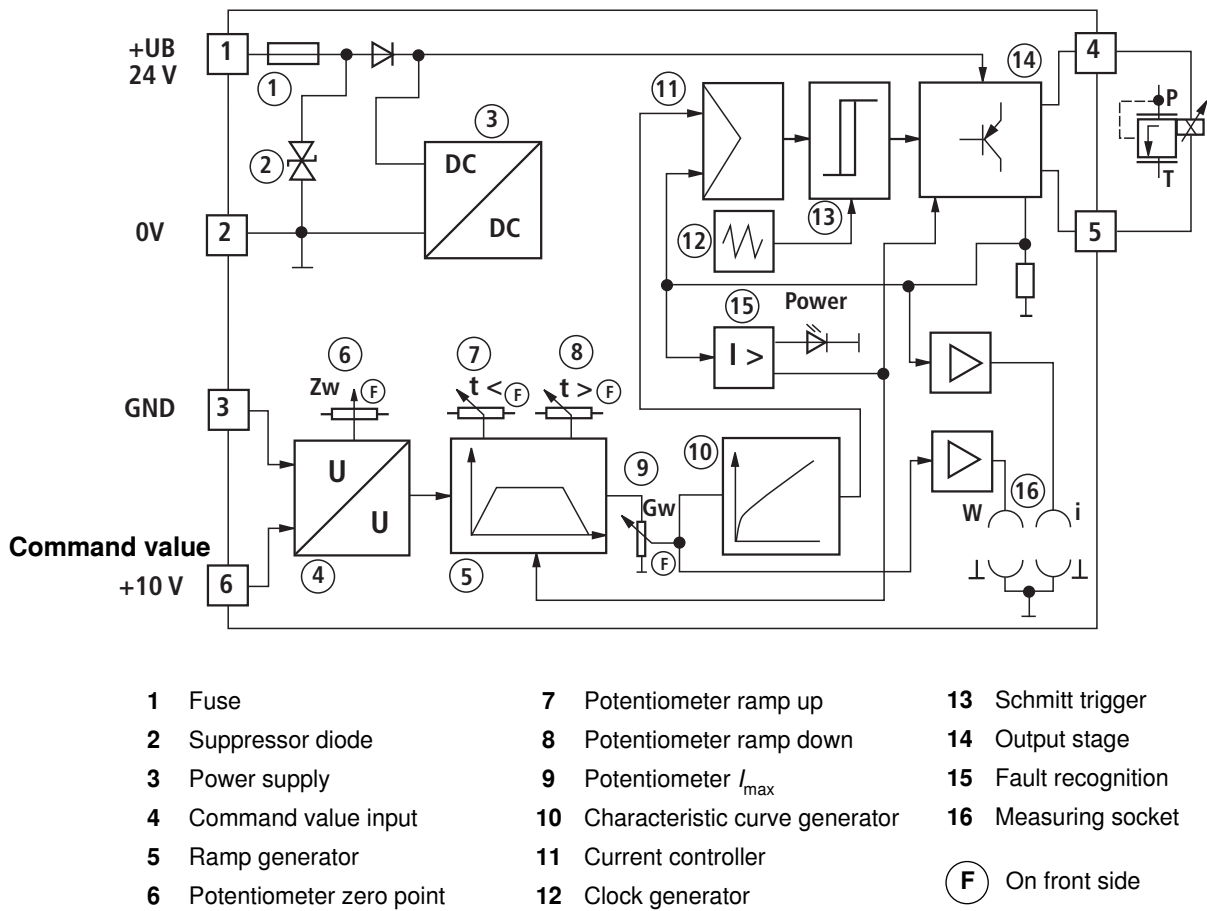


Terminal assignment / device view

Terminal assignment

| Terminal |                       |
|----------|-----------------------|
| 1        | $+U_B$                |
| 2        | Ground                |
| 3        | $-U_{\text{command}}$ |
| 4        | Solenoid +            |
| 5        | Solenoid -            |
| 6        | $+U_{\text{command}}$ |

Device view

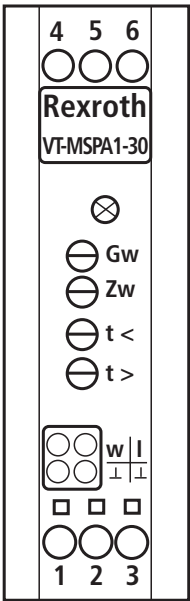

**Potentiometer:** "Gw" Pressure command value  
"Zw" Zero point  
"t <" Ramp time up  
"t >" Ramp time down

**Sockets:** "w" Pressure command value  
"I" Actual current value  
"⊥" Measurement null

**Technical Data** (For applications outside these parameters, please consult us!)


|                                        |                      | VT-MSPA1-30                                               | VT-MSPA1-150                    |  |
|----------------------------------------|----------------------|-----------------------------------------------------------|---------------------------------|--|
| Operating voltage                      | $U_B$                | 24 VDC +40 % –10 %                                        |                                 |  |
| Operating range:                       |                      |                                                           |                                 |  |
| – Upper limit value                    | $u_B(t)_{\max}$      | 35 V                                                      |                                 |  |
| – Lower limit value                    | $u_B(t)_{\min}$      | 21 V                                                      |                                 |  |
| Power consumption                      | $P_{\max}$           | < 25 VA                                                   |                                 |  |
| Current consumption                    | $I_{\max}$           | < 1 A                                                     |                                 |  |
| Fuse                                   | $I_s$                | Electronic overload protection and SMD fuse (soldered in) |                                 |  |
| Inputs                                 |                      |                                                           |                                 |  |
| – Command value (differential input)   | $U_{\text{command}}$ | 0 to +10 V; $R_e = 100\text{ k}\Omega$                    |                                 |  |
| Outputs                                |                      |                                                           |                                 |  |
| – Bias current (factory setting)       | $I_V$                | 100 mA                                                    | 200 mA                          |  |
| – Solenoid current / resistance        | $I_{\max}$           | 800 mA; $R_{20} = 19.5\ \Omega$                           | 700 mA; $R_{20} = 19.5\ \Omega$ |  |
| – Frequency                            | $f$                  | 200 Hz                                                    | 100 Hz $\pm 10\ \%$             |  |
| Setting ranges                         |                      |                                                           |                                 |  |
| GW: Solenoid current                   | $I$                  | 100 mA...800 mA                                           | 200 mA...700 mA                 |  |
| ZW: Zero point                         |                      | $\pm 25\ \%$                                              | $\pm 25\ \%$                    |  |
| t >: } Ramp                            | $t$                  | 60 ms...5 s                                               | 60 ms...5 s                     |  |
| t <: }                                 |                      |                                                           |                                 |  |
| Measuring sockets                      |                      |                                                           |                                 |  |
| – Command value "w"                    | $U$                  | 0 to 10 V                                                 |                                 |  |
| – Actual current value "I"             | $U$                  | 1 mV $\triangleq$ 1 mA solenoid current                   |                                 |  |
| Type of connection                     |                      | 6 screw terminals                                         |                                 |  |
| Mounting type                          |                      | Top hat rail TH 35-7.5 according to EN 60715              |                                 |  |
| Protection class according to EN 60529 |                      | IP 20                                                     |                                 |  |
| Dimensions (W x H x D)                 |                      | 25 x 79 x 85.5 mm                                         |                                 |  |
| Admissible operating temperature range | $\vartheta$          | 0 to +50 °C                                               |                                 |  |
| Storage temperature range              | $\vartheta$          | –25 to +85 °C                                             |                                 |  |
| Weight                                 | $m$                  | 0.15 kg                                                   |                                 |  |

**Important:**


Information on the **environment simulation testing** for the areas EMC (electromagnetic compatibility), climate and mechanical load see 30223-U (declaration on environmental compatibility).

## Output characteristic curve


VT-MSPA1-30

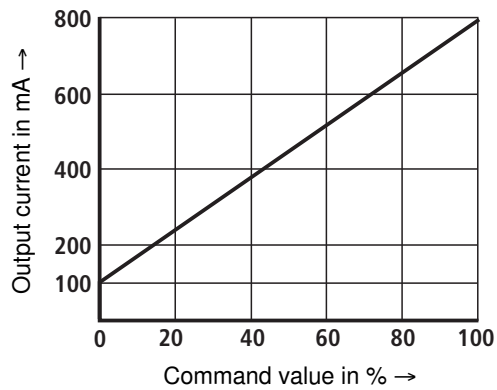

VT-MSPA1-150

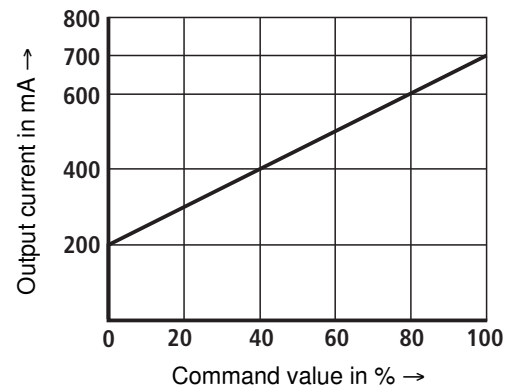

## Unit dimensions (dimensions in mm)

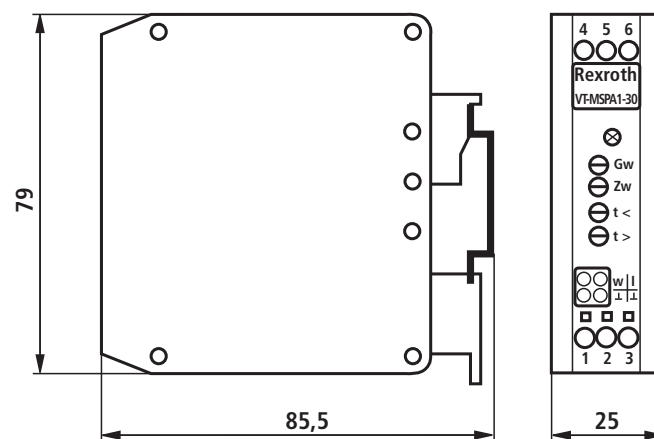

## Project planning / maintenance instructions / additional information

---

- The amplifier module may only be wired when de-energized!
- The distance to radios must be sufficient ( $> 1$  m)!
- Screen command value lines, do not lay them close to power cables, screen solenoid lines!
- Do not use **free-wheeling diodes** in the solenoid lines!
- With a strongly fluctuating operating voltage, it may in the individual case be necessary to use an external smoothing capacitor with a capacity of at least  $2200 \mu\text{F}$ .

Recommendation: Capacitor module VT 11110 (see RE 30750); sufficient for up to 3 amplifier modules.

## Notes

---

Bosch Rexroth AG  
Hydraulics  
Zum Eisengießer 1  
97816 Lohr am Main, Germany  
Phone +49 (0) 93 52 / 18-0  
Fax +49 (0) 93 52 / 18-23 58  
documentation@boschrexroth.de  
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

## Notes

---