

Pressure shut-off valve pilot operated, seawater resistant Type DA...-5X/...J

When compared to the standard version the following modifications have been carried out:

- The external metal components have been electro-galvanised or given an anti-corrosion protection.
- Seawater resistance is identified by the code „J“ in the ordering code.

Note:

Valve fixing screws must be ordered separately:

Nom. size 10: 4 off M10 x 50 DIN 912-10.9 A3C or NEL ¹⁾ $M_A = 75 \text{ Nm}$, Material No. 00011405

Nom. size 32: 2 off M18 x 80 DIN 912-10.9 A3C or NEL ¹⁾ $M_A = 430 \text{ Nm}$, Material No. 00700949

¹⁾ The code NEL stands for non-electrolytically applied zinc coatings which contain a lubrication additive for the reduction of friction in accordance with ISO/WD 10683, colour silver.

Further information can be obtained from the standard documentation RE 26 411.

Ordering details

DA		2		5X/200		17		J
Nominal size 10	= 10							J =
Nominal size 32	= 30							Sea water resistant
Adjustment element								Switching pressure differential (P → A)
Sleeve with internal hexagon and protective cap		= 2						17 = In the mid range 17 %
								Settable pressure range
								200 = 100 to 200 bar


Preferred types

Type	Material No.
DA 10-2-5X/200-17J	00572165
DA 30-2-5X/200-17J	00513844


Unit dimensions:

(Dimensions in mm)


NS 10:

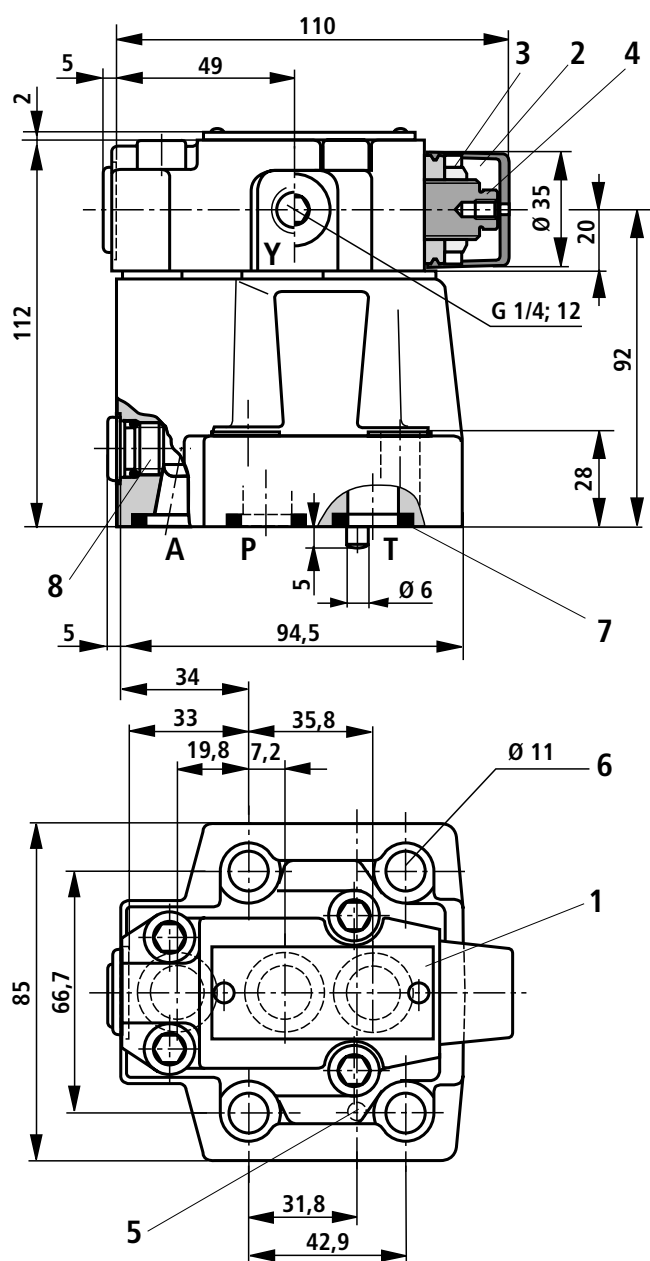

NS 32:

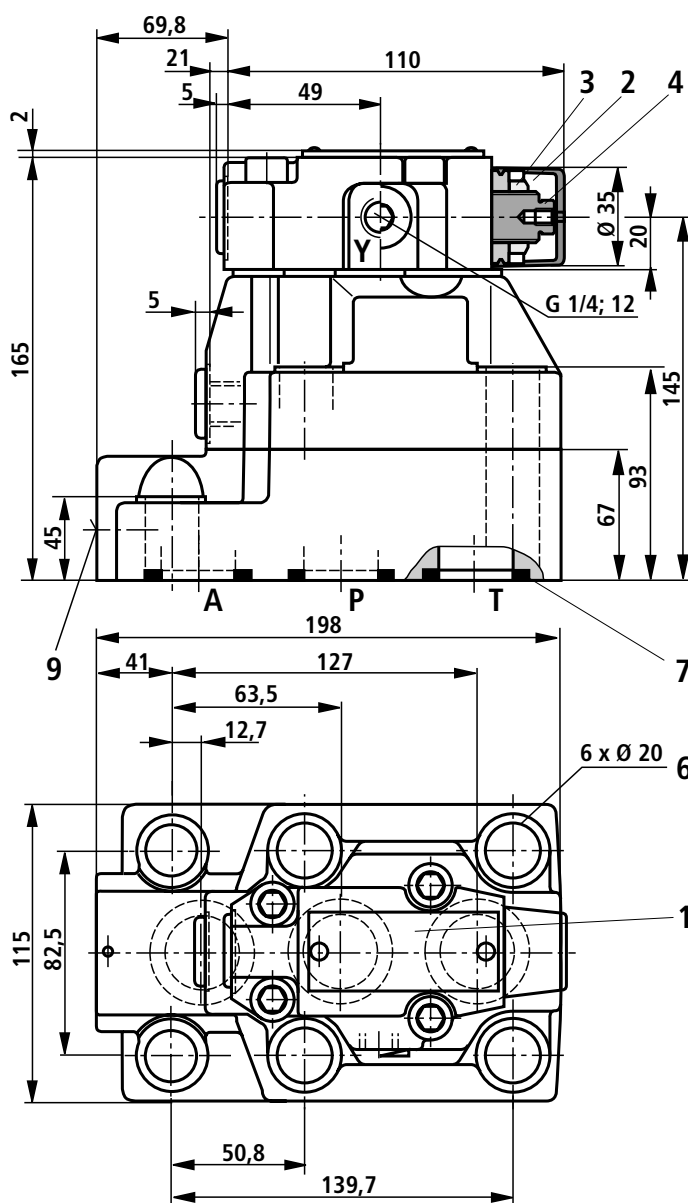

- | | |
|---|---|
| 1 Name plate | 7 R-rings for ports A, P, T |
| 2 Adjustment element "2" | NS 10: 17.56 x 2.4 x 2.62 |
| 3 Lock nut 17 A/F | NS 32: 34.52 x 3.53 x 3.53 |
| 4 Hexagon 10 A/F | 8 Integrated check valve
(only for NG 10) |
| 5 Locating pin (only for NS 10) | 9 Check valve (sandwich plate)
(only for NS 32) |
| 6 Valve fixing holes (valve fixing screws
see page 1) | |



Required surface finish of mating piece

Mannesmann Rexroth AG
Rexroth Hydraulics

D-97813 Lohr am Main
Jahnstraße 3-5 • D-97816 Lohr am Main
Telefon 0 93 52 / 18-0
Telefax 0 93 52 / 18-23 58 • Telex 6 89 418-0
eMail product.support@rexroth.de
Internet www.rexroth.com

Mannesmann Rexroth Limited

Cromwell Road, St Neots,
Cambs, PE19 2ES
Tel: 0 14 80/22 32 56
Fax: 0 14 80/21 90 52
E-mail: info@rexroth.co.uk

The specified data is for product description purposes only and may not be deemed to be guaranteed unless expressly confirmed in the contract.