

Subplates size 10 and size 16 with porting pattern according to DIN 24340 form G, ISO 6263 and CETOP-RP 121 H

RE 45066/02.11
Replaces: 01.03


1/4

Maximum operating pressure 350 bar
Size 10 and 16

Table of contents

Contents	Page
Type G 279/01 (G 1/2); G 280/01 (G 3/4) - size 10	2
Type G 281/01 (G 1); G 282/01 (G 1 1/4) - size 16	3


Type G 279/01 (G 1/2); G 280/01 (G 3/4) - size 10 (nominal dimensions in mm)

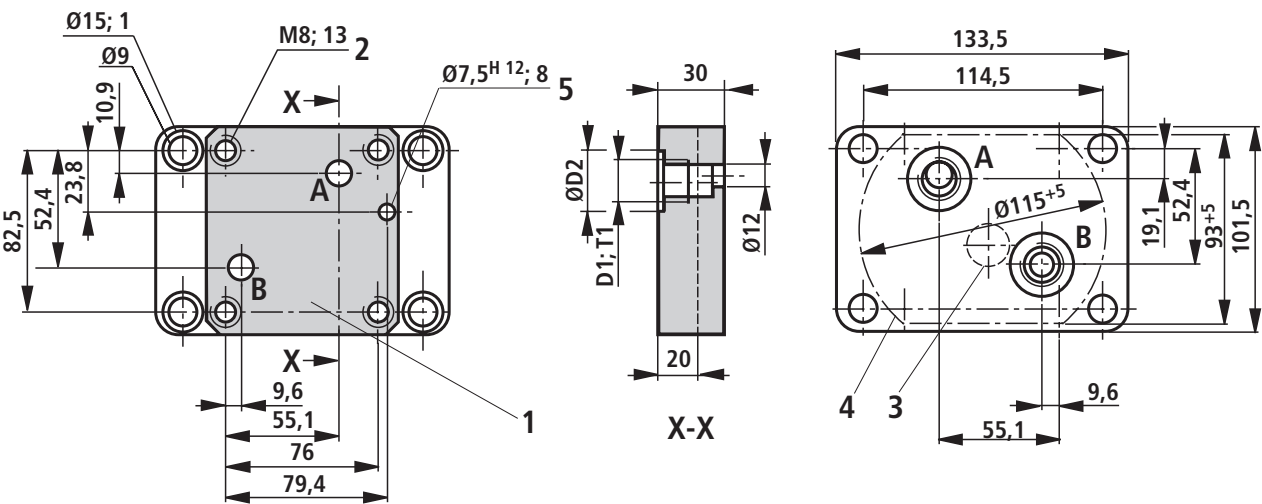

Type	Material no.	D1	ØD2	T1	Weight in kg	Valve mounting screws
G 279/01	R900424433	G 1/2	34	15	2.3	4 hexagon socket head cap screws ISO 4762 - M8 - 10.9 (separate order)
G 280/01	R900424437	G 3/4	42	17	2.3	

- 1 Valve mounting face, ground
- 2 Valve mounting bores
- 3 Ø20; keep free from bores for orifice support
- 4 Front panel break-through
- 5 Bore for locating pin

Note on the valve mounting screws:
Length and tightening torque of the screws depend on the valve types and the sandwich plates that might be provided.

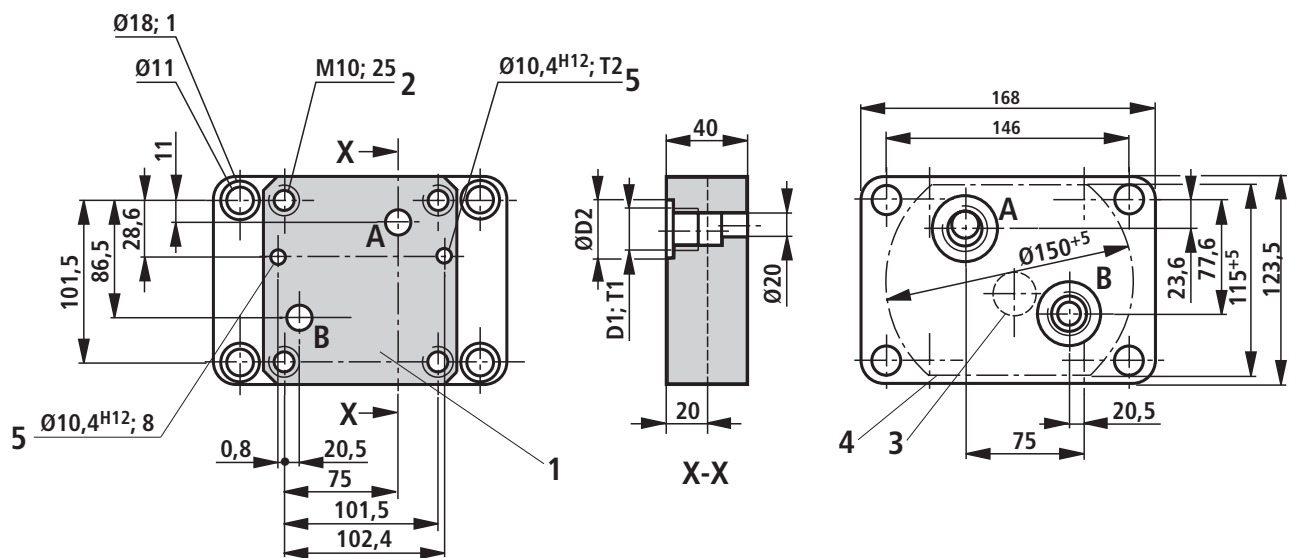Type G 281/01 (G 1); G 282/01 (G 1 1/4) - size 16 (nominal dimension in mm)

Type	Material no.	D1	ØD2	T1	T2	Weight in kg	Valve mounting screws
G 281/01	R900424440	G 1	47	19	8	4	4 hexagon socket head cap screws ISO 4762 - M10 - 10.9 (separate order)
G 282/01	R900424442	G 1 1/4	56	21	4.5	4	

- 1 Valve mounting face, ground
- 2 Valve mounting bores
- 3 Ø30; keep free from bores for orifice support
- 4 Front panel break-through
- 5 Bore for locating pin

Note on the valve mounting screws:

Length and tightening torque of the screws depend on the valve types and the sandwich plates that might be provided.

Notes
