

Subplate size 6 with porting pattern according to DIN 24340 form A and ISO 4401 and CETOP-RP 121 H

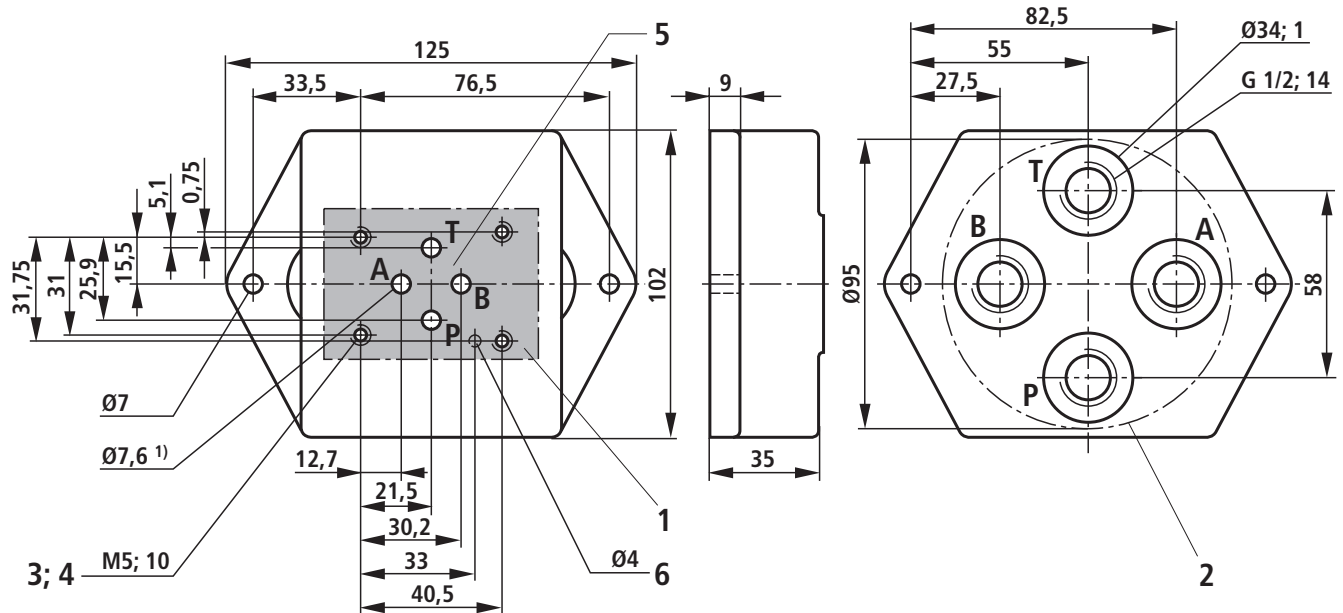
RE 45052/02.11
Replaces: 01.03

1/4

Maximum operating pressure 350 bar
Size 6

Table of contents

Contents	Page
Type G 341/01, G341/60 (G1/4)	2
Type G 342/01, G 342/60 (G3/8)	2
Type G 502/01, G 502/60 (G1/2)	3

Type G 502/01, G 502/60 (G1/2) (nominal dimensions in mm)

Type	Material no.	Weight in kg
G 502/01	R900455110	1.9

- 1 Valve mounting face
- 2 Front panel break-through
- 3 Valve mounting bores
- 4 Valve mounting screws
4 hexagon socket head cap screws ISO 4762 - M5 - 10.9
(separate order)
- 5 **without** locating hole according to DIN 24 340 form A
(ordering code: e.g. G 341/**01**)
- 6 **with** locating hole according to ISO 4401 and
CETOP-RP 121 H (ordering code: e.g. G 341/**60**)

Note on the valve mounting screws:

Length and tightening torque of the valve mounting screws depend on the valve types and the sandwich plates that might be provided.

¹⁾ Maximum dimension

Notes
