

Subplates size 10 with porting pattern to DIN 24340 form A and ISO 4401


RE 45054/10.05
Replaces: 01.03

1/4

Size 10

G 534/01 (G3/4) (nominal dimensions in mm)

For directional spool valves

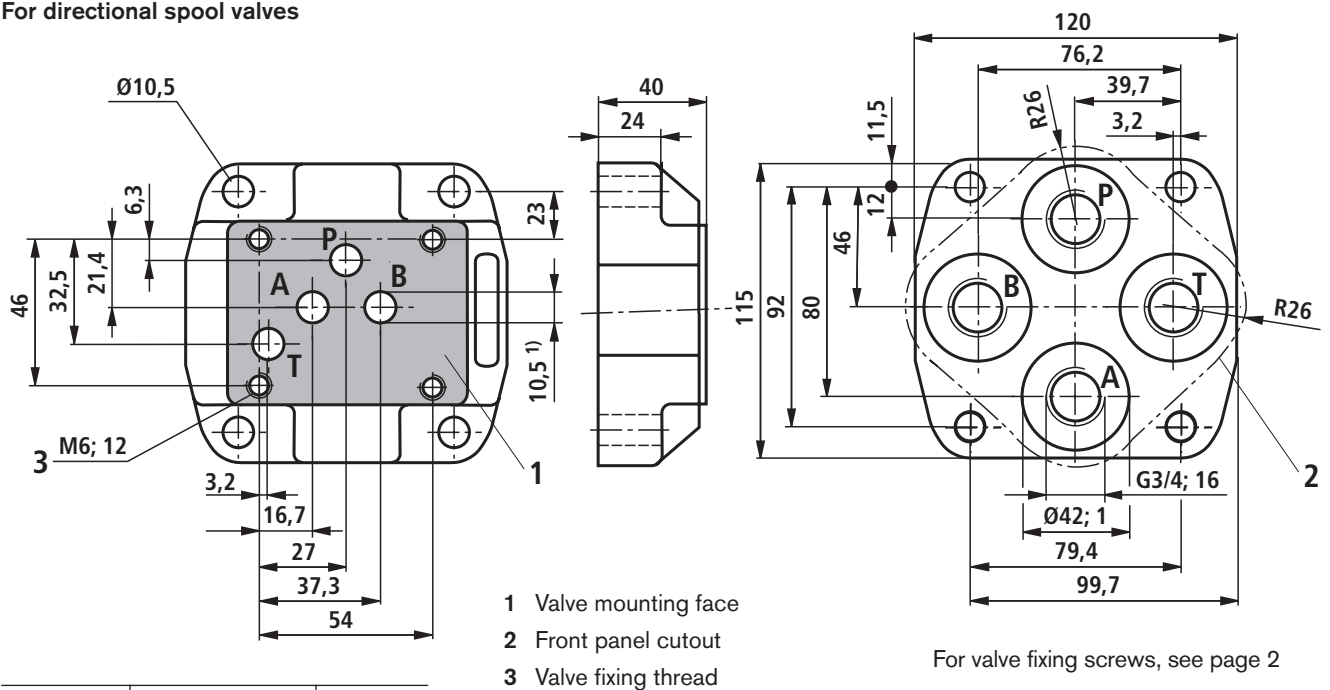


Type	Material no.	Weight in kg
G 534/01	R900467259	approx. 2.5

¹⁾ Deviating from ISO 4401 and
DIN 24340!

Types G 535/01; G 535/02; G 536/01; G 536/02 (nominal dimensions in mm)

For directional spool valves

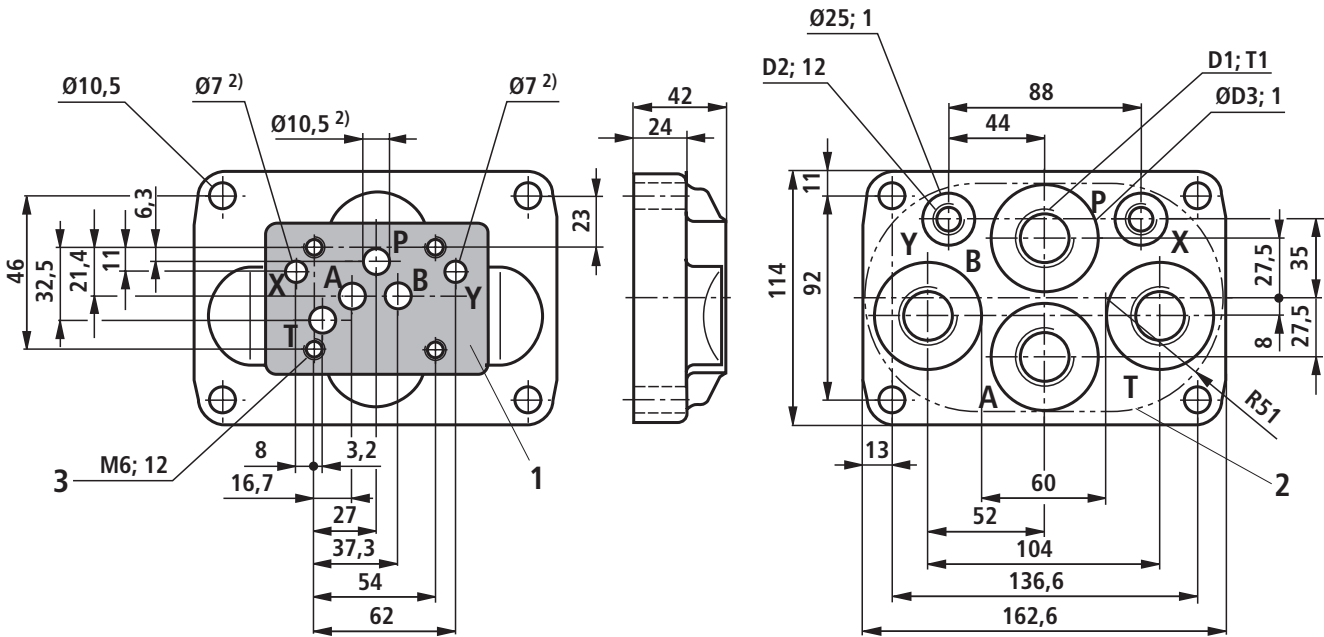

Type	Material no.	Weight in kg	D1	D2	ØD3	T1	Valve fixing screws ¹⁾ (separate order)	M _T in Nm
G 535/01	R900476061	approx. 3.6	G3/4	G1/4	42	16	4 socket head cap screws ISO 4762 - M6 - 10.9	15.5
G 535/02	R900339376		M27x2	M14x1.5	42	16		
G 536/01	R900476059		G1	G1/4	47	18		
G 536/02	R900489146		M33x2	M14x1.5	47	18		


- 1 Valve mounting face
- 2 Front panel cutout
- 3 Valve fixing thread

¹⁾ **Notes on valve fixing screws:**
The length and tightening torque of valve fixing screws depend on the valve types and sandwich plates possibly provided.

²⁾ Deviating from ISO 4401 and DIN 24340!

Type G 66/01 (G3/8); G 67/01 (G1/2) (nominal dimensions in mm)

For directional spool valves and directional poppet valves up to 315 bar

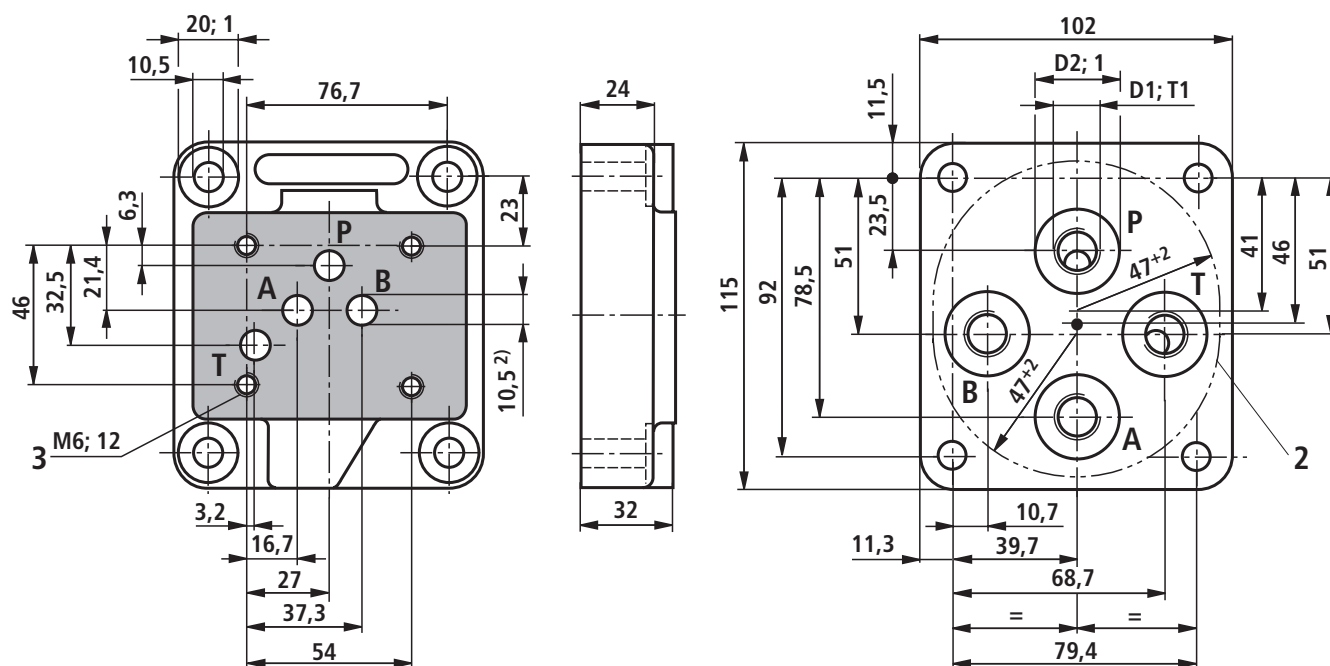

Type	Material no.	Weight in kg	D1	ØD2	T1	Valve fixing screws ¹⁾ (separate order)	M_T in Nm
G 66/01	R900424457	approx. 2.3	G3/8	28	12	4 socket head cap screws ISO 4762 - M6 - 10.9	15.5
G 67/01	R900424460		G1/2	34	14		

- 1 Valve mounting face
- 2 Front panel cutout
- 3 Valve fixing thread

¹⁾ **Notes on valve fixing screws:**

The length and tightening torque of valve fixing screws depend on the valve types and sandwich plates possibly provided.

²⁾ Deviating from ISO 4401 and DIN 24340!

