

Hydrocyclone extractor Type IZF

RE 50411/09.09

1/2

Technical information

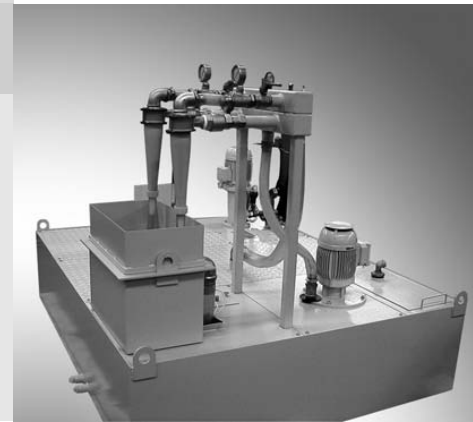


Table of contents

Contents

Introduction

Function

Page

1

2


Introduction

Hydrocyclone cleaning systems in the normal system structure can be adapted to meet local and operating requirements. The feed pump is matched to the capacity of the feed pump and this, in turn, to the operating requirements. In the cyclone, materials of a higher specific gravity than the fluid are separated from the fluid. The cleaned fluid is returned to the consumer.

Function

The fluid flowing back from the consumer is received in the tank by the cyclone feed pump and fed to the cyclone. In the cyclone, material of a higher specific gravity than the fluid is extracted on the extraction side of the cyclone and fed into the sludge tank (approx. 5 % of the circulated quantity). The

cleaned fluid passes into the clean tank, is taken up by the feed pump and returned to the consumer. This represents the usual system structure of a hydrocyclone cleaning system. Special versions adapted to local and operating requirements are possible at any time.

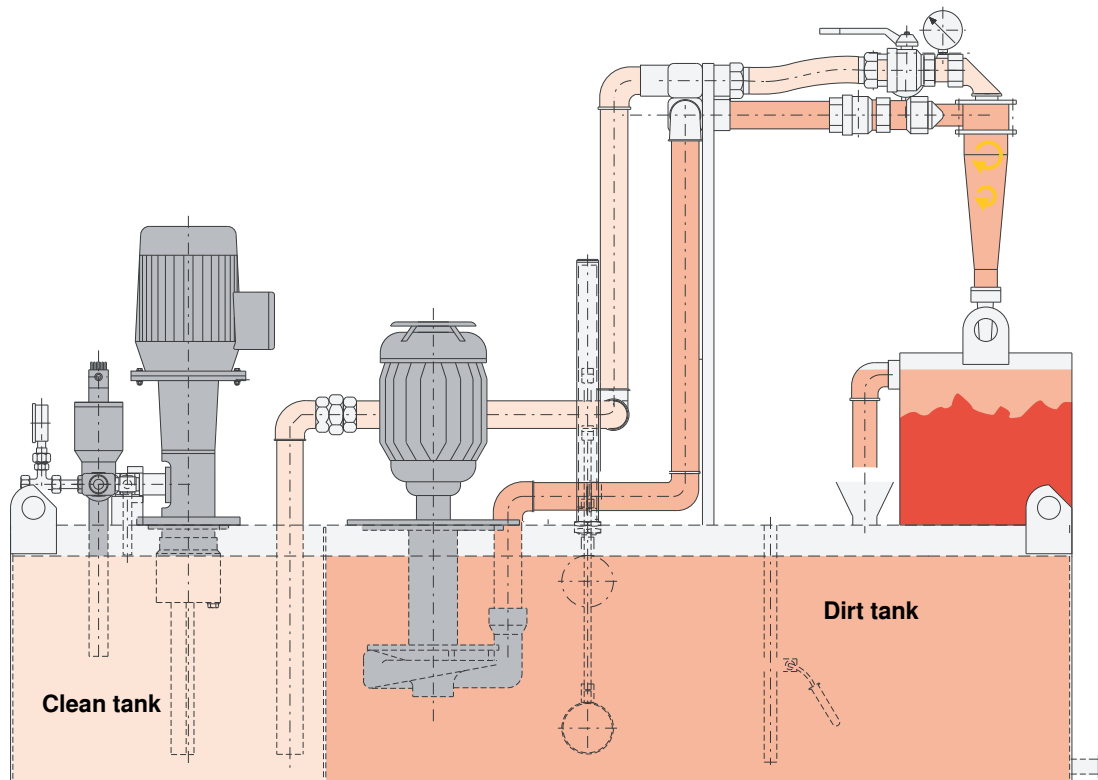

Hydrocyclone

Size A up to 20 l/min	Size B up to 90 l/min
Size C up to 30 l/min	Size D up to 650 l/min

Number of cyclones according to the flow rate.

Tank size according to customer request.

Bosch Rexroth Interlit GmbH
 Stolberger Str. 374
 50933 Köln
 Telefon +49 (0) 2 21 / 49 05-5 50
 Telefax +49 (0) 22 03 / 66 93-29
 documentation@boschrexroth.de
 www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.